

FIG.1

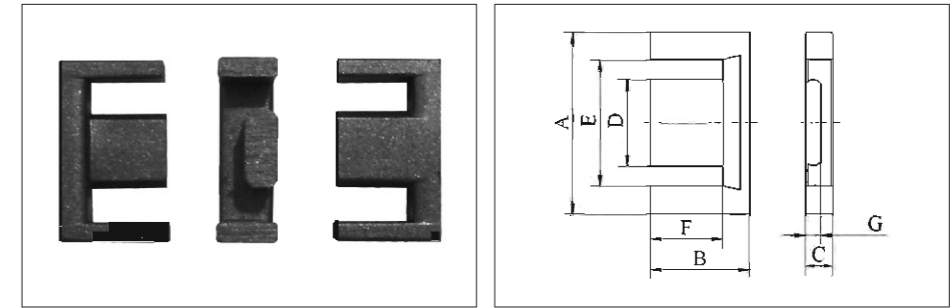


FIG.2

EM 型 / EM Core

型号 TYPE	图例 FIG.	尺寸 Dimensions ( mm )						
		A	B	C	D	E	F	G
EM12.4/6	1	12.4±0.2	6±0.2	4±0.1	5.15±0.15	9.65±0.25	4.6±0.2	2.2±0.1
EM12.6/12.4/4	1	12.6±0.35	6.15+0.2/-0.1	4±0.2	5±0.2	9.9min	4.75+0.2/-0.1	2±0.2
EM12.7/7A	1	12.7±0.25	6.85±0.15	3.3±0.15	6±0.1	9.0min	4.55±0.15	1.85±0.1
EM13.4/6	1	13.4±0.2	6.05±0.15	3.5±0.15	6.8±0.1	10.4±0.2	3.9±0.15	1.8±0.1
EM15/19/3.8	1	15±0.4	9.5±0.16	3.8±0.2	5.3±0.2	11±0.35	6.7±0.25	1.9±0.15
EM17.5/15/5.2	1	17.5±0.3	7.5±0.2	5.2±0.2	6±0.15	12.7min	5.3±0.2	3.75±0.2
EM20.5/9C	1	20.45±0.25	8.75±0.15	8±0.25	8.8±0.15	15.3min	6.35±0.15	4.4±0.15
EM20.7/24.6/4.2B	2	20.7±0.4	12.3±0.1	4.15±0.15	10.2±0.15	15.5min	9.2±0.15	2.05±0.1
EM21.5/21A	1	21.5±0.4	20.6±0.15	4.65±0.15	8.2±0.15	14.2min	17.65±0.15	2.9±0.1
EM22.7/8A	1	22.9±0.35	7.75±0.15	10.2±0.2	7.5+0/-0.3	16.8+0.5/-0.1	4.4+0.25/-0.15	7.0+0/-0.3
EM25/25/7.6	1	25±0.65	12.5±0.2	7.6±0.2	11.4±0.3	18.7±0.6	9.3±0.2	4.3±0.2
EM25.8/28.1/14.9A	1	26+0.1/-0.5	14.05±0.15	14.9±0.25	10±0.2	18.4min	10.3±0.15	10.8±0.15
EM26/14B	1	26±0.4	13.7±0.2	10.3±0.2	11.6±0.2	17.8±0.4	9.6+0.2/-0.15	7.4±0.15
EM26.4/28/9.8	1	26.4±0.65	14±0.25	9.8±0.2	10±0.2	19.8±0.6	10.15±0.25	3.3±0.2
EM27.4/26/7	1	27.4±0.4	13±0.2	7±0.2	13±0.2	21.4±0.4	10±0.2	3.2±0.15
EM28/17A	1	28±0.4	16.8±0.2	13±0.2	9±0.2	20.3+0.5/-0.2	12.3+0.3/-0.1	8.6±0.2
EM30/21A	1	30±0.5	21.3±0.3	5.5±0.25	15±0.3	21.5min	17+0.3/-0.1	3±0.15
EM31.5/43.6/6.9	1	31.5±0.45	21.8±0.2	6.9±0.25	12.5±0.2	23.1±0.4	17.6±0.2	4.4±0.2
EM36/24G	1	36.25±0.5	23.5±0.15	10±0.2	14±0.2	26min	18.8±0.2	5±0.2
EM36.5/33.8/11.5	1	36.5±0.7	16.9±0.3	11.5±0.4	15.3±0.3	26.5±0.5	11.7±0.2	7.7±0.3
EM37/20A	1	37±0.6	19.8±0.3	6.7±0.3	18.8±0.3	25.7min	14.55±0.25	

C1	Ae	Le	Amin	Ve	AL(±25%)				重量 g / PRS
					TP4	TP4A	TP4W	TPW33	
2.59	11.18	28.92	11.00	323.30	710	730	830	880	1.68
3.01	10.04	30.25	9.40	303.70	590	600	690	730	1.70
2.43	11.95	29.03	11.10	346.90	710	730	840	880	1.91
2.21	12.07	26.68	10.50	322.00	710	728	830	870	1.73
3.00	12.82	38.59	10.07	494.70	530	548	640	680	3.14
1.59	22.91	36.32	22.50	832.10	1240	1280	1480	1570	4.30
1.10	38.79	42.80	38.40	1660.30	1880	1940	2270	2420	8.45
2.58	20.91	53.95	19.92	1128.10	820	850	1000	1070	6.10
3.21	26.83	86.25	23.78	2314.00	670	700	840	900	7.18
0.66	58.61	38.85	50.35	2276.90	2650	2730	3170	3370	12.00
1.19	48.50	57.74	47.88	2800.40	1870	1940	2290	2460	15.62
0.59	108.05	64.20	105.79	6936.80	3810	3940	4680	5030	34.89
0.71	85.23	60.09	84.46	5121.70	3200	3310	3930	4210	60.00
0.95	65.80	62.70	62.00	4130.00	2270	2350	2790	3000	21.80
1.48	41.50	62.00	41.60	2596.00	1540	1590	1890	2030	14.00
0.82	91.04	74.71	77.40	6801.60	2460	2550	3050	3280	35.20
2.04	44.94	91.75	44.00	4123.30	1180	1220	1470	1590	36.00
1.71	56.67	96.71	55.00	5480.60	1410	1460	1760	1900	28.15
1.27	81.84	104.00	70.00	8511.40	1680	1750	2110	2280	46.40
0.66	117.25	77.53	115.00	9090.40	3550	3680	4400	4740	47.20
1.22	71.30	86.73	70.35	6183.60	1980	2050	2460	2660	50.31

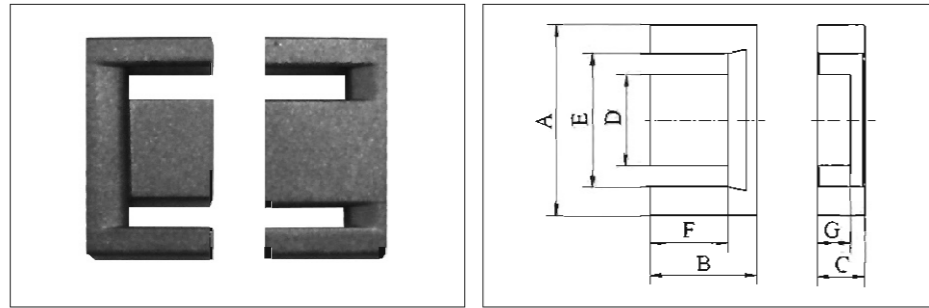


FIG.1

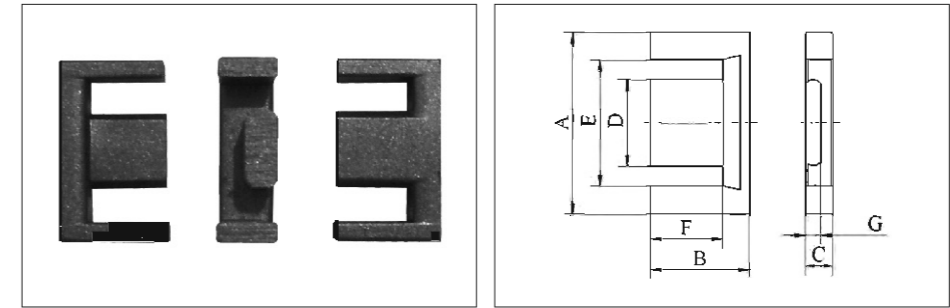


FIG.2

**EM 型 / EM Core**

型号 TYPE	图例 FIG.	尺寸 Dimensions ( mm )						
		A	B	C	D	E	F	G
EM37.7/35.6/7.6	1	37.7±0.65	17.8±0.2	7.6±0.25	18.8±0.3	29.5±0.6	13.3±0.2	3.4±0.2
EM38/41.2/7.6A	2	38+0.9/-0.4	20.6±0.2	7.6±0.25	18.8±0.3	29.4min	15.8+0.3/-0.1	3.4±0.2
EM39/24A	2	39±0.7	23.55±0.25	9.6±0.35	17.7+0.2/-0.3	31±0.7	17.55±0.2	4.5±0.2
EM41/45/15B	1	41±0.8	22.5±0.2	15±0.2	19.5±0.2	28.7min	16±0.25	9±0.2
EM42.9/52.6/6.5	1	42.9±0.7	26.3±0.15	6.45±0.15	21.6+0.2/-0.3	28min	18.8±0.15	4.25+0.1/-0.15
EM43/53/6.7	1	43±0.5	26.5±0.2	6.65±0.2	21.6±0.3	29.4±0.5	18.7±0.2	4.35±0.2
EM43.4/44/8B	2	43.4±0.6	22.1±0.2	8±0.3	22.5±0.3	33.5min	17±0.2	3.2±0.15
EM45.2/49.4/5.9	2	45.2±0.8	24.7±0.2	5.9±0.3	24±0.4	33.6±0.8	18±0.2	2.9±0.2
EM45.3/49.8/5.8	2	45.2+0.7/-0.5	24.9±0.2	5.65+0.25/-0	24±0.4	33.1min	18±0.2	2.9±0.2
EM45.5/48.6/6.5	1	45.5±0.8	24.3±0.25	6.5±0.3	22.8±0.35	33.4±0.7	17.7±0.25	3.3±0.2
EM49/53.2/7B	2	49±0.6	26.6±0.2	7+0.2/-0.3	27+0.15/-0.35	35.3min	19.3+0.2/-0.1	3.5+0.1/-0.3
EM50/56/6.2D	1	50±0.8	28+0.3/-0.2	6.2+0.1/-0.2	24±0.3	34.4min	20.6+0.3/-0.2	3.2±0.15
EM50.1/35.1/6.4	1	50.1±0.5	17.55±0.2	6.4+0.15/-0.2	27+0.15/-0.3	35.5min	10.25±0.2	7.05±0.2
EM50.1/53.3/6.4	1	50.1±0.5	26.65±0.2	6.4+0.15/-0.2	27+0.15/-0.3	35.5min	19.35±0.15	3.4+0.05/-0.2
EM50.4/47.4/8.2A	1	50.4±0.7	23.7±0.3	8.2±0.3	26.2±0.3	36.4min	17±0.3	4.15±0.25
EM50.5/52.4/12	2	50.5±1	26.2±0.2	12±0.3	21.3±0.3	37.5min	19±0.2	7.5±0.3
EM50.7/26	2	50.7±0.7	25.6±0.25	9±0.35	23.6±0.3	38.1±0.7	18.5±0.25	5±0.2
EM50.7/28	2	50.7±0.7	27.85±0.25	9±0.35	23.6±0.3	38.1±0.7	20.75±0.25	5±0.2
EM51.2/55.5/5.9	1	51.2+0.5/-0.6	27.75±0.3	5.85±0.15	28±0.25	37+1.2/-0	20.75±0.35	3±0.15
EM66/35A	2	66±1.5	35.1±0.25	18±0.3	28±0.4	45.6min	23.1+0.4/-0.3	11±0.25

C1	Ae	Le	Amin	Ve	AL(±25%)				重量 g /PRS
					TP4	TP4A	TP4W	TPW33	
1.29	64.00	84.00	62.32	5345.00	1800	1860	2240	2410	28.50
1.46	64.74	94.25	62.32	6101.80	1630	1690	2040	2200	32.00
1.24	83.49	103.23	76.80	8618.70	1860	1930	2330	2520	45.20
0.55	179.45	98.47	175.50	17671.20	4430	4590	5540	5990	88.00
1.18	92.33	109.27	91.16	10089.00	2100	2180	2640	2860	54.43
1.16	94.18	109.65	90.44	10326.80	2080	2160	2610	2830	52.00
1.37	74.50	101.83	72.00	7586.60	1760	1830	2210	2390	60.00
1.53	70.00	107.60	67.50	7542.00	1580	1640	1980	2140	58.00
1.53	70.38	107.56	67.05	7570.10	1570	1630	1970	2130	41.30
1.36	78.57	106.67	75.24	8381.40	1770	1840	2220	2400	44.76
1.24	93.11	115.01	91.00	10708.70	2010	2080	2520	2730	55.70
1.43	84.72	120.90	76.80	10243.00	1620	1680	2040	2210	53.50
0.87	90.67	79.11	89.53	7172.70	2720	2820	3370	3630	34.40
1.28	90.40	115.46	89.68	10437.50	1970	2040	2480	2680	73.00
0.98	109.12	106.61	108.73	11633.10	2560	2660	3210	3480	61.32
0.76	156.02	118.80	144.00	18534.70	3090	3200	3880	4210	94.20
0.97	118.33	115.29	113.40	13642.50	2490	2590	3140	3400	75.00
1.07	115.98	124.88	112.62	14483.10	2310	2400	2910	3160	75.00
1.49	81.65	121.30	79.27	9904.40	1670	1730	2100	2280	52.60
0.44	342.99	149.84	308.00	51394.30	5360	5570	6800	7390	278.00